



18 Watt Fixed Wall Plug Series



Features

- Limited Power Source (LPS)
- Class B EMI
- Level VI Compliant
- Class II Double Insulated
- High Efficiency
- Low Cost

Applications

- Wireless Communications
- Peripherals
- Portable Equipment
- PDA

Safety Approvals

- cUL/UL 60950-1

Mechanical Characteristics

- Length: 83.5mm (3.29in)
- Width: 35mm (1.38in)
- Height: 53.5mm (2.11in)

Output Specifications

Model	DC Output Voltage	Load		Ripple ⁽¹⁾ P-P (max.)	Regulation Line & Load
		Min.	Max.		
PSAC18A-120L6-R	12V	0A	1.5A	240mV	±5%

Notes: (1) Measured after 30 minutes with by-pass capacitors 0.1uF/10uF at output connector terminal and oscilloscope set at 20Mhz.

Input:

AC Input Voltage Rating
100 to 240V AC

AC Input Voltage Range
90 to 264V AC

AC Input Frequency
47 to 63Hz

Input Current
0.5A (RMS) max at 100V AC/60Hz

Leakage Current
0.25mA maximum at 240Vac/50Hz

Inrush Current
<40A for 115V AC at max load
<60A for 230V AC at max load
(Cold start at ambient 25°C)

Output:
Efficiency
US DOE Level VI

Environmental:
Temperature
Operation 0 to +40°C
Non-operation -20 to +70°C
Humidity 90% RH max

Emissions

Complies with FCC Class B
Complies with EN55032 Class B

Immunity

EN61000-4-2, Level 4, contact 8kv, Air 15kV, Criteria B
EN61000-4-3, Criteria A
EN61000-4-4, Criteria B
EN61000-4-5, Level 3, line to neutral ± 1 kV; line/neutral to FG, Criteria B
EN61000-4-6, Criteria A
EN61000-4-8, Criteria A
EN61000-4-11, Criteria B

Hold-up Time

10mS min at 115Vac/60Hz, max load

Over-Voltage Protection

20.4V max at 80Vac~264Vac/50Hz, max load

Over-Current Protection

3A max


Dielectric Withstand (Hi-pot) Test

Primary to Secondary: 3000V AC for 1 min., 10mA

DC Output Connector

Barrel plug 5mm x 2.1mm x 10mm

Dimension Diagram Unit: mm

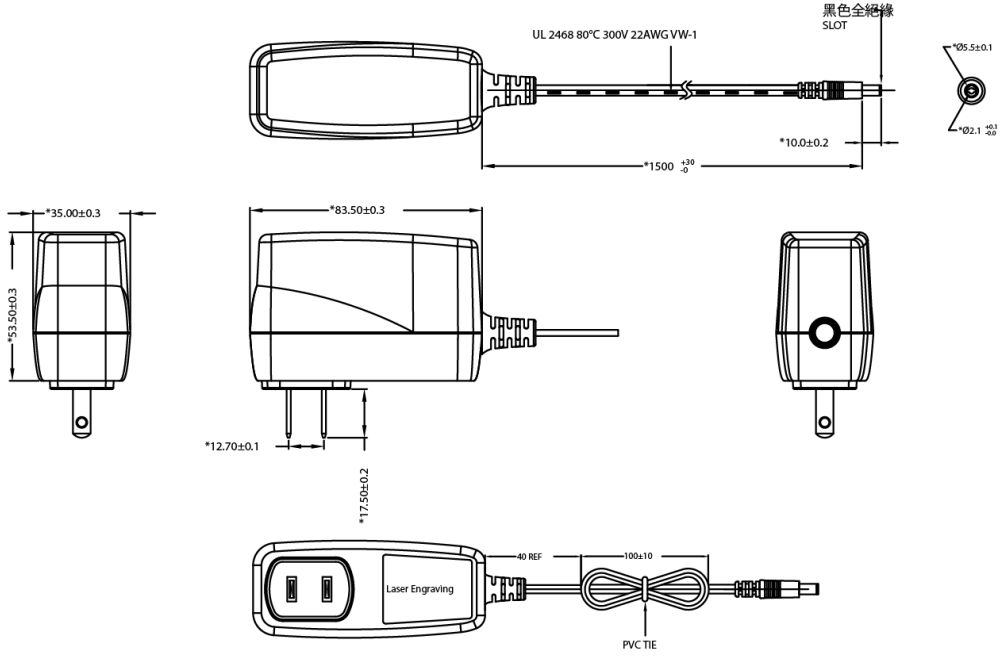

**Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information**

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this product series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.