

# POE60U-PSA5660-R



## 60W Passive High Surge PoE Injector



### Features

- Meets 6kV L-L, 6kV L-PE Surge; 6kV Output Surge
- Compliant with Pihong Proprietary 12.5K Detection
- 4 Pair Powering +3, 6, 4, 5 / -1, 2, 7, 8
- Multi-Gigabit Data Rates (1G, 2.5G, 5G, 10G) Models
- DoE Level VI Compliant
- Non-Vented Case
- Over-Current, Over-Voltage & Short Circuit Protections
- Limited Power Source (LPS)
- 1-year Warranty

### Applications

- Pan-Tilt-Zoom IP Cameras
- Wireless Network Access Points
- Bluetooth® Access Points
- Point of Sales
- Information Kiosks

### Description

Pihong POE60U-PSA5660-R 60W passive high surge Power-over-Ethernet (PoE) injector is a reliable solution designed to meet the demands of modern networking infrastructure. Available in data speed of 5G and serves as a vital component in PoE systems, offering robust power delivery alongside data transmission over Ethernet cables — meeting 6kV Line-to-Line, 6kV L-to-Earth IEC 61000-4-5 surge and 6kV Output surge.

Pihong, a reputable manufacturer known for its high-quality power solutions, has integrated safety features such as short-circuit, over-current and over-voltage protections into the injectors, providing peace of mind for user applications.

# POE60U-PSA5660-R



## Specifications<sup>1</sup>

Model		POE60U-PSA5660-R <sup>2</sup>
Output	DC Output Voltage	56.0V
	Output Current Minimum Load	10mA
	Max Current	1.07A
	Output Power	60W
	Data Speed	5G
	Regulation <sup>3</sup>	53-57VDC
	Ripple & Noise P-P(max) <sup>4</sup>	200mV
Input	AC Input Voltage Range	90 to 264VAC
	AC Input Frequency	47 to 63Hz
	Input Current	1.5 (RMS) max for 90VAC
	No Load Power Consumption at 115VAC Input	≤ 0.21W
	No Load Power Consumption at 230VAC Input	≤ 0.21W
	115VAC Average Efficiency <sup>5</sup>	≥ 88%
	230VAC Average Efficiency <sup>5</sup>	≥ 88%
	Leakage Current	3.5mA max at 264VAC/50Hz
Protections	Over-Voltage	Non-latching
	Over-Current	Output #1 <650mA; Output #2 <650mA; Output #1 and #2 <1300mA; Output #1 and #2 (12.5K) <1500mA
	Short Circuit	The output can be shorted permanently. Non-latching
	Surge	IEC 61000-4-5: 6kV L-L; 6kV L-PE; 6kV Output
Environmental	Operating Temperature	-20°C to +40°C
	Non-Operating Temperature	-20°C to +70°C
	Operating Humidity	10 to 90% RH max
Safety and EMC Standards (Designed to meet...)	Dielectric Withstand (HI-POT)	Primary to Secondary: 4242VDC for 1 min, 10mA Primary to Earth Ground: 2121VDC for 1 min, 10mA
	Insulation Resistance	>10M ohm for 500VDC
	Standards	cULus 62368-1, CAN/CSA C22.2 No.62368-1, IEC 62368-1, BSMI
	EMI Emissions	FCC Part 15 Class B, CAN ICES-003(B)/NMB-003(B), EN 55032/CISPR 32 Class B Conducted and Radiated
	Harmonic Current Emissions	IEC 61000-3-2
	Voltage Fluctuations & Flicker	IEC 61000-3-3
	Immunity	EN 55035/CISPR 35: IEC 61000-4-2 (Contact: ±8KV, Air: ±15KV), IEC 61000-4-3 (3V), IEC 61000-4-4 (1kV Input/0.5kV Output), IEC 61000-4-5 (6kV L-L/6kV L-PE), IEC 61000-4-6 (3V), IEC 61000-4-11
Mechanical	Dimensions (L x W x H)	140mm (5.12in) x 67.0mm (2.64in) x 38.0mm (1.49in)
	Weight	270g
	Input Connector	IEC320 C14
	Output Connector	Shielded RJ45 +3, 6, 4, 5 / -1, 2, 7, 8
	LED Indications	Solid Green: Connection ON, Blink Red (short, slow): Awaiting Valid Connection, Blink Red (long, fast): Faulty Condition (Over Current or Shorted), Blink Red & Green: Detection is Invalid
Notes	<ol style="list-style-type: none"> <li>The specifications defined are at ambient temperature of 25°C, unless otherwise specified.</li> <li>Special order model. Minimum order quantity applies.</li> <li>Voltage to be measured within 5cm of the RJ45 output connector.</li> <li>Measured within 2 inches of RJ45 with by-pass capacitors 0.1uF/10uF at output connector terminal &amp; oscilloscope set at 20MHz.</li> <li>Efficiency is measured after 30 minutes burn-in.</li> </ol>	





**Supplier's Declaration of Conformity  
47 CFR § 2.1077 Compliance Information**

MODELS

POE60U- PSA5660-R




Phihong USA Corporation  
47800 Fremont Boulevard  
Fremont, CA 94538  
Telephone: (510) 445-0100  
[www.phihong.com](http://www.phihong.com)

*This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

# C14 Line Cords




Sold Separately

Model		AC30UNA-R	AC30UEU-R	AC30UUK-R
Specifications	Plug Type	North America NEMA 5-15P	Continental Europe CEE 7VIII	United Kingdom BS 1363
	Connector	IEC320 C13	IEC320 C13	IEC320 C13
	Wire Size	18 AWG	0.75mm	1.0mm
	Temperature	60°C	60°C	70 °C
	Amperage Rating	10A	6A	10A
	Voltage Rating	125V	250V	250V
	Cable Length	1830mm	1830mm	2500mm
Safety Approvals		CSA; UL	CEBEC; DEMKO; DVE; FIMKO; GOST; IMQ; KEMA; NEMKO; NF; OVE; SEMKO	BSI; Safety Mark
Photos				


# C14 Line Cords

## Outline Drawing (mm)

### AC30UNA-R

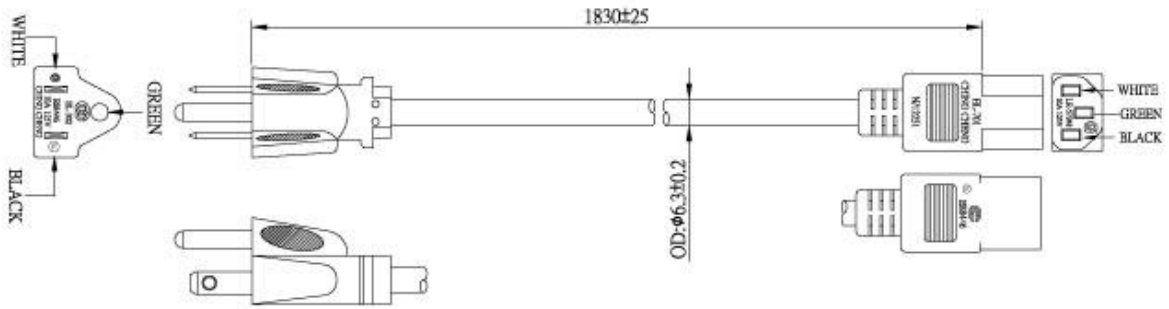

### AC30UEU-R

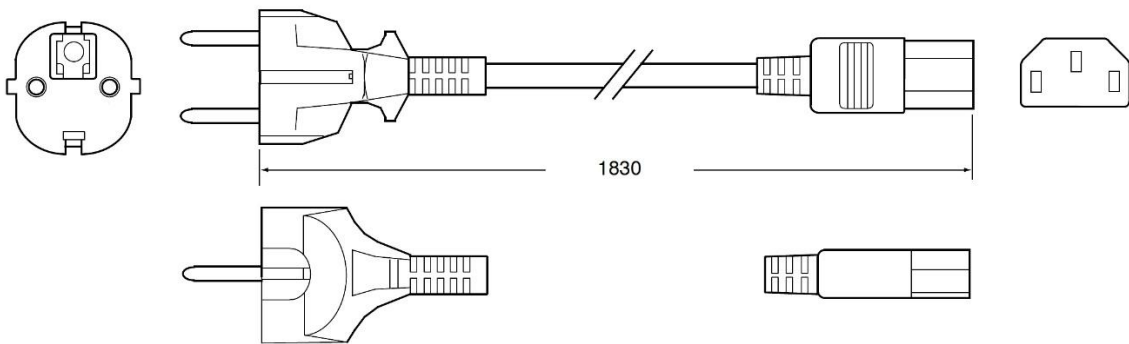

### AC30UUK-R

